

Development and Simulation Two Wireless Hosts Communication Network Using Omnet++

M. Derbali¹

¹Faculty of Computing and Information Technology (FCIT), Department of Information Technology (IT), King Abdulaziz University (KAU) Jeddah, Saudi Arabia

Abstract

A wireless network is a collection of computers and other electronic devices that exchange information by means of radio waves. Endpoint computing devices can all be connected without the need for hardwired data cabling thanks to the prevalence of wireless networks in today's businesses and networks. This paper's aim is to create and construct a wireless network model for connecting two hosts which will be implemented to simulate wireless communications. The sending of User Datagram Protocol (UDP) data by one of the hosts to the other one has been wirelessly specified by the simulator. Additionally, the protocol models were kept as simple as possible including both the physical layer and the lower layer. The architecture and functionality of a new simulator is showed its ability to solve the issues of making a host move, especially, when it gets out of the range the simulation ends.

Keywords: wireless network, wireless hosts, modelling of protocols, simulation Omnet++

Received on 12 September 2023, accepted on 23 November 2023, published on 30 November 2023

Copyright © 2023 M. Derbali *et al.*, licensed to EAI. This is an open access article distributed under the terms of the [CC BY-NC-SA 4.0](#), which permits copying, redistributing, remixing, transformation, and building upon the material in any medium so long as the original work is properly cited.

doi: 10.4108/eetiot.4519

*Corresponding author. Email: mderbali@kau.edu.sa

1. Introduction

To transmit data or work collaboratively between equipment without wires, wireless networking is implemented for allowing the use wireless signals including radio or infrared frequency. The proliferation of wirelessly connected mobile devices has increased the value of wireless networks. Wireless networks are also widely applied in wireless sensor networks that are groups of autonomous, location-distributed sensors which monitor environmental or physical parameters. In addition, the technical and industrial communities in the field of wireless communication are currently conducting extensive research into a promising area of wireless network [1]. The framework can facilitate connectivity sharing among wirelessly mobile and cooperative hosts. Hosts that have a wireless internet connectivity and a second link to a different network (a "dual homer") can

operate as "temporal gateways" sharing their second connection to the internet with other hosts in the group. This system offers load-balance traffic over many gateways with simultaneously improving accessibility and service levels [2]. Wireless networks are thought to be more prone to errors than wired networks. Because of this dissimilarity, researchers have been pushed to develop new sets of protocols tailored to wireless networks. While much is known about the nature of errors in wired networks, for wireless LANs there is significantly less experimental data. In many scenarios, wireless network physical layer error rates are on par with those of cable connections [3]. The achievement of a building project can hinge on the efficiency of transmitting data between the plant and the decision-making agency. It enables decision-makers stationed elsewhere to keep tabs on things from a far via centralized data storage and a network of remotely positioned sensors. Deploying high-bandwidth, flexible data communication networks like wired LANs can be time-consuming and expensive in construction projects

following components as shown in Figure 1 are created: WirelessHost, IPv4NetworkConfigurator, IRadioMedium, IntergratedCanvasVisualizer, WirelessHost, and IPv4NetworkConfigurator.

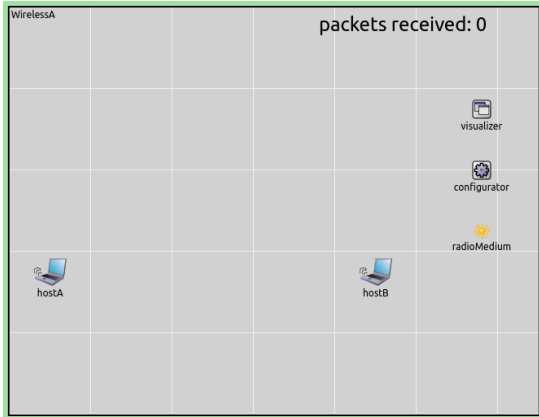


Figure 1. The created components in INET4 library

The NED format, WirelessHost, is a standard for TCP/IP hosts where various network interfaces and protocol components such as TCP, UDP, and IP are included in it. In INET, StandardHost is available in a few other versions, such as WirelessHost, which is essentially a StandardHost optimized for wireless use cases. A configurator submodule of the network, the Ipv4NetworkConfigurator, is responsible for assigning IP addresses to hosts. Furthermore, in order for hosts to communicate with one another, it is necessary for them to know each other's MAC addresses; in this approach, this is accomplished through the use of GlobalArp modules installed locally on each host rather than through the use of actual ARP. Without a radio medium module, i.e. IRadioMedium, INET cannot simulate wireless networks. This component stands for the shared physical media through which signals are transmitted. Among the physical processes it must account for signal propagation and attenuation as well as interference. With a variety of radio medium modules, INET can simulate the wireless physical layer at granularity levels. The simplest model, UnitDiskRadioMedium, is employed at this stage. A variant of unit disc radio is incorporated into its functionality. Such that the communication range is simply given in meters, and not in terms of physical processes like signal attenuation. All existing canvas visualizers can be found in the IntergratedCanvasVisualizer module. As long as the type parameter is left blank, any submodule visualizer can be disabled. It enables the visualization of operations that Omnet++ Naturally doesn't provide. The implementing NED cod is written as below:

```
import
inet.networklayer.configurator.ipv4.IPv4NetworkConfigurator;
import
inet.physicallayer.contract.packetlevel.IRadioMedium;
import inet.node.inet.WirelessHost;
import
inet.visualizer.integrated.IntegratedCanvasVisualizer;
import
inet.physicallayer.ieee80211.packetlevel.Ieee80211ScalarRadioMedium;
//
// TODO auto-generated type
//
network WirelessNetwork
{
    parameters:
        @display("bgb=600,600");
    submodules:
        visualizer:
            IntegratedCanvasVisualizer;
        configurator:
            IPv4NetworkConfigurator;
        radioMedium:
            Ieee80211ScalarRadioMedium {
                @display("p=356.36,129.256");
            }
        hostA: WirelessHost {
            @display("p=172.744,194.48799");
        }
        hostB: WirelessHost {
            @display("p=450,195");
        }
}
```

3.2. Network Components Configuration

Configuration components are implemented in this section for object in the network in order to properly work the Omne++ code. Omnet++ allows them to be defined and used in place of IP addresses, actions, denotations, and so on in configuration files. Modifying an item in one location results in that change being mirrored wherever it is referenced, making configuration maintenance much simpler. Without objects, it would have to individually adjust the settings for each feature as needed. An IP address and subnet mask can be defined in a network object, and if you need to make a change to either, you need to make the adjustment in the object definition rather than in every feature that makes use of the address. Objects are configured in the omnet.ini file as below:

```

[General]
description = Simple sim where two host
communicate wirelessly
network = WirelessNetwork
sim-time-limit = 60s
*.host*.ipv4.arp.typename = "GlobalArp"

# HostA Configuration
*.hostA.numApps = 1
*.hostA.app[0].typename = "UdpBasicApp"
*.hostA.app[0].destAddresses = "hostB"
*.hostA.app[0].destPort = 5000
*.hostA.app[0].messageLength = 1000B
*.hostA.app[0].sendInterval =
exponential(12ms)
*.hostA.app[0].packetName = "UDPData"

# HostB Configuration
*.hostB.numApps = 1
*.hostB.app[0].typename = "UdpSink"
*.hostB.app[0].localPort = 5000

# WLAN Configuration
*.host*.wlan[0].typename =
"AckingWirelessInterface"
*.host*.wlan[0].mac.useAck = false
*.host*.wlan[0].mac.fullDuplex = false
*.host*.wlan[0].radio.transmitter.communic
ationRange = 500m
*.host*.wlan[0].radio.receiver.ignoreInter
ference = true
*.host*.wlan[0].mac.headerLength = 23B

*.host*.**.bitrate = 1Mbps

# Visualizer Configuration
**.radio.displayCommunicationRange = true
*.visualizer.mediumVisualizer.displaySigna
ls = true
*.visualizer.physicalLinkVisualizer.displa
yLinks = true
*.visualizer.physicalLinkVisualizer.packet
Filter = "UDPData*"
*.visualizer.mobilityVisualizer.displayVel
ocities = true
*.visualizer.mobilityVisualizer.displayMov
ementTrails = true

# Add Mobility to Hosts
*.hostA.mobility.typename =
"LinearMobility"
*.hostA.mobility.speed = 12mps
*.hostA.mobility.initialMovementHeading =
200deg

```

4. Case study

In the case study, the simulation entails the following steps: Host A's UdpBasicApp generates UDP packets at random intervals, which are then transmitted via UDP and IPv4 to the network interface. The network interface queues and transmits the packets without any gaps between them. These events can be observed through OMNeT++'s Qtenv runtime GUI. The provided Figure 2, displays the internal process of host A during the simulation, showcasing the transmission of a UDP packet from the udpApp submodule through the intermediate protocol layers and wlan interface.

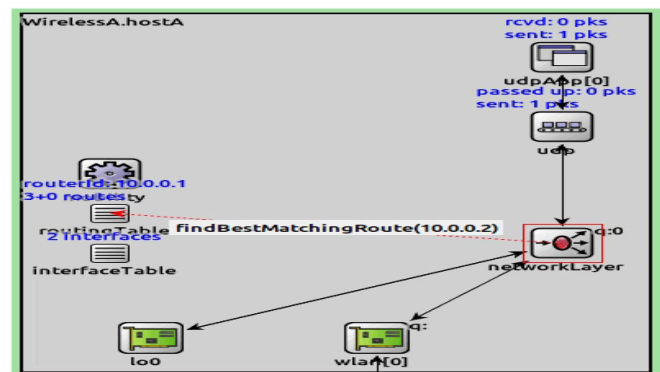


Figure 2. The inside of host A during the simulation

4.1. Hosts

In INET, hosts are typically represented by the StandardHost NED type. This template includes TCP, UDP, and IP protocol components, slots for application models, and various network interfaces (NICs). INET also offers variations of the StandardHost, such as WirelessHost, which is preconfigured for wireless scenarios.

The host type in this NED file is parametric, defined through a hostType parameter and the INetworkNode module interface. This allows us to easily replace hosts with a different NED type in later steps. The current NED type specified is WirelessHost, but this can be overridden using omnetpp.ini.

4.2. Address assignment

IP addresses are assigned to hosts by an Ipv4NetworkConfigurator module, which acts as the configurator submodule in the network. Additionally, the hosts need to know each other's MAC addresses for communication. In this model, we use per-host GlobalArp modules instead of real ARP to handle MAC address resolution.

A MAC (Media Access Control) address, also known as a hardware or physical address, is a unique 12-character alphanumeric attribute used to identify electronic devices

on a network. An example of a MAC address is: 00-B0-D0-63-C2-26.

4.3 Traffic model

In this model, host A generates UDP packets that are received by host B. Host A is configured with a `UdpBasicApp` module, which generates random 1000-byte UDP messages at intervals that follow an exponential distribution with a mean of 12ms. This results in an UDP traffic rate of 100 kbyte/s (800 kbps), excluding protocol overhead. Host B is equipped with a `UdpSink` application that simply discards the received packets.

Additionally, the model tracks the number of packets received by host B. This information is displayed using the `@figure[rcvdPkText]` line, and the following line ensures that the figure is updated during the simulation.

4.4 Physical layer modelling

Let's focus on the `radioMedium` module in this step. In INET, all wireless simulations require a radio medium module. This module represents the shared physical medium where communication occurs, taking into account signal propagation, attenuation, interference, and other physical phenomena.

INET provides different levels of detail for modeling the wireless physical layer, each realized with a different radio medium module. For this step, we are using the simplest model called `UnitDiskRadioMedium`. It implements a variation of the unit disc radio model, which disregards physical phenomena like signal attenuation. Instead, the communication range is directly specified in meters. As long as there are no collisions, transmissions within the specified range will always be received correctly.

Modeling collisions and interference range are optional in this context. It's important to note that this model of the physical layer isn't an accurate representation of reality, but it serves its purpose in simulations. Its simplicity and predictability are advantageous in scenarios where realistic physical layer modeling is not the main concern, such as in the modeling of ad-hoc routing protocols. The use of the `UnitDiskRadioMedium` in simulations also provides faster results due to its low computational cost.

In terms of hosts, network interface cards (NIC) are represented by NIC modules, with the radio being a part of wireless NIC modules. There are different radio modules available, and it's necessary to choose one that is compatible with the medium module. In this case, hosts contain the `GenericUnitDiskRadio` as part of the `AckingWirelessInterface`.

To configure the chosen physical layer model (Unit Disk Radio Medium and Generic Unit Disk Radio), the following settings are applied: the communication range is set to 500m, packet losses due to collisions (referred to as "interference" in this model) are disabled, resulting in independent duplex communication channels. The radio

data rates are set to 1 Mbps. These values can be adjusted in the `omnetpp.ini` file using the appropriate module parameters, such as `communication Range`, `ignore Interference`, and `bitrate`.

4.5 MAC layer

NICs modules in the `AckingWirelessInterface` include an L2 protocol, specifically the data link layer. The MAC protocol in the interface is configurable, with the default option being `MultipleAccessMac`. However, `MultipleAccessMac` is a simple MAC layer that only handles encapsulation/ decapsulation and lacks a proper medium access protocol. In this case, there is essentially no medium access control, as packets are transmitted immediately after the previous packet has finished transmission. Additionally, `MultipleAccessMac` may have an optional out-of-band acknowledgment mechanism, which we have disabled in this scenario.

In the following animation shown in Figure 3, you can observe the communication between hosts using OMNeT++'s default "message sending" animation.

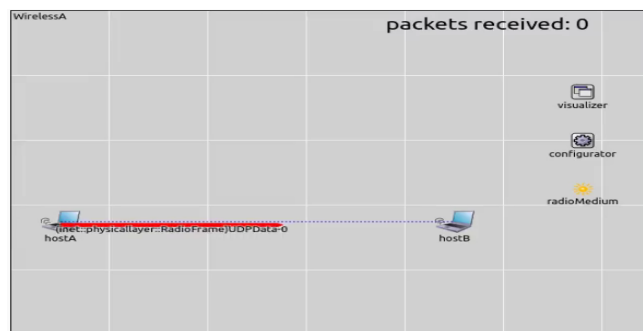


Figure 3. The communication between the hosts

5. Results and Discussion

Two `WirelessHost` are first developed using the components listed in Section 2. Since wireless signals require a medium in which to travel, `IRadioMedium` is subsequently added. Since IP addresses are required for communication between wireless hosts, `IPv4NetworkConfigurator` is included to the NED file.

During the simulation, the following events occur. Host A's `UdpBasicApp` generates UDP packets at random intervals. These packets are then sent via UDP and IPv4 to the network interface for transmission. The network interface queues the packets and transmits them as soon as it is able to. As long as there are packets in the transmission queue of the network interface, they are sent consecutively without any gaps between them.

These events can be tracked on OMNeT++'s `Qtenv` runtime GUI. The illustration below depicts the internal workings of host A during the simulation. It shows a UDP packet being sent from the `udpApp` submodule, passing

through the intermediate protocol layers, and transmitted by the wlan interface.

At the conclusion of the simulation at $t=25s$, the packet count meter indicates that approximately 2000 packets were sent. Each packet with overhead measures 1028 bytes, resulting in a transmission rate of around 660 kbps.

In Figure 4, the blue circle represents the communication range of host A. It indicates that host B is within this range, which means successful communication is possible.

Furthermore, there is a dotted arrow between host A and host B, representing successful communication at the physical layer. This arrow is created once a packet reception is successfully completed and the packet is passed up to the link layer. It is displayed after the reception of the first packet at host B.

It is worth noting that the two hosts, A and B, are transmitted back-to-back without any gap between them, as illustrated in Figure 4.

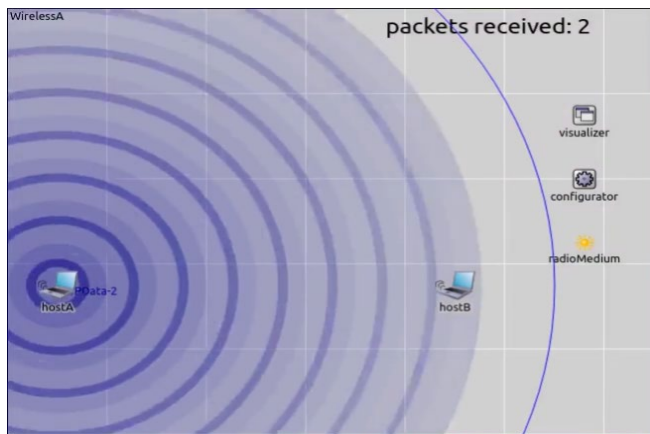


Figure 4. No gap back-to-back transmissions

In order to see the results of the network simulation, the IntergratedCanvasVisualizer is included at the end. Ports, packet size, send interval, etc. are set in the configuration. Most communication between wireless hosts is governed by this configuration file. As shown in Figure 5, This complete network interaction now kicks off with hosts communicating with one another via messages. This causes hostA to begin withdrawing from hostB's vicinity. When HostA moves out of range of HostB, communication ceases and the simulation finish after 60 seconds.

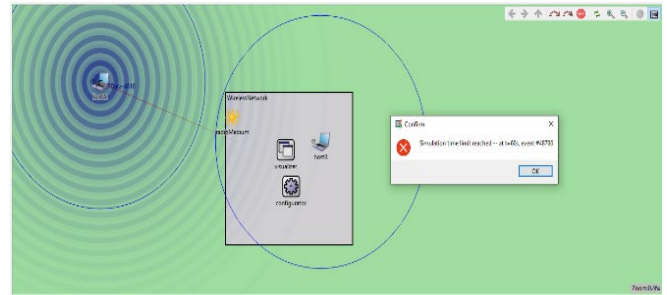


Figure 5. Simulation results of the two wireless hosts communication networks

6. Conclusion

In this study, a model of a wireless network that is capable of linking two hosts has been developed and put together in order to mimic wireless communications. The simulator was developed with the help of the INET 4 Library, which incorporates the following components: WirelessHost, IPv4NetworkConfigurator, IRadioMedium, IntergratedCanvasVisualizer, and WirelessHost. Configuration components of objects are enabled the network to properly work the Omne++ code. The developed complete network can be interacted with hosts communicating via messages. When hostA go away from hostB's range, communication ceases and the simulation finish after 60 seconds. The architecture and functionality of a new simulator is showed its ability to solve the issues of making a host move, especially, when it gets out of the range the simulation ends.

Therefore, wireless with the Mobility, cost saving, high connectivity and a speed considered as greatest advantages of wireless communication. The advanced mechanization allows the transfer of data within a few seconds only. A wired network can easily be affected by external interruptions, which is not the case in wireless.

In addition, the wireless network offers various opportunities for industrial solutions and enables communication over both short and long distances on a global scale. Moreover, the utilization of Wireless Sensor Networks (WSNs) and the Internet of Things (IoT) can be highly advantageous, as these technologies are currently in high demand. While WSNs and IoT each have their own advantages, combining them can result in the development of robust applications. WSNs are mainly used for data collection from the environment, while IoT controls devices or provides user information. Understanding the differences between WSNs and IoT allows for informed decision-making when choosing the most suitable technology for a given situation.

References

- [1] **Journal article:** Obaidat, M.S., Green, D.B. (2003). Simulation of Wireless Networks. In: Obaidat, M.S., Papadimitriou, G.I. (eds) Applied System Simulation. Springer, Boston, MA. https://doi.org/10.1007/978-1-4419-9218-5_6
- [2] **Conference:** J. -g. Jia, Z. -w. He, J. -m. Kuang and L. Xie, "A Method of Modeling and Simulation for Wireless Network Based on HLA," 2009 First International Conference on Information Science and Engineering, 2009, pp. 2448-2451, doi: 10.1109/ICISE.2009.62.
- [3] **Conference:** David Eckhardt and Peter Steenkiste. 1996. Measurement and analysis of the error characteristics of an in-building wireless network. In Conference proceedings on Applications, technologies, architectures, and protocols for computer communications (SIGCOMM '96). Association for Computing Machinery, New York, NY, USA, 243–254. <https://doi.org/10.1145/248156.248178>.
- [4] **Journal article:** Brilakis, Ioannis. (2007). Long-distance wireless networking for site - Office data communications. Electronic Journal of Information Technology in Construction. 12.
- [5] **Journal article:** Qi, Xiaoshuang. (2022). The Influence of Wireless Network Communication and Edge Computing on the Performance of Aerobics Athletes. Wireless Communications and Mobile Computing. 2022. 10.1155/2022/1604478.
- [6] **Journal article:** Esteban Egea-Lopez, Alejandro Martinez-Sala, Javier Vales-Alonso, Joan Garcia-Haro, Josemaria Malgosa-Sanahuja, Wireless communications deployment in industry: a review of issues, options and technologies, Computers in Industry, Volume 56, Issue 1, 2005, Pages 29-53, <https://doi.org/10.1016/j.compind.2004.10.001>.
- [7] **Conference:** Ojaroudi Parchin, N., et al., "Dual-polarized MIMO antenna array design using miniaturized self-complementary structures for 5G smartphone applications," 13th European Conference on Antennas and Propagation (EuCAP), Krakow, Poland, Mar. 31–Apr. 5, 2019.
- [8] **Journal article:** B. I. Bakare and J. D. Enoch, et al., "A review of simulation techniques for some wireless communication system," *International Journal of Electronics, Communications and Computer Engineering*, vol. 10, pp. 60–70, 2019
- [9] **Journal article:** M. Z. Chowdhury., et al., "6G wireless communication systems: applications, requirements, technologies, challenges, and research directions," *IEEE Open Journal of the Communications Society*, vol. 1, pp. 957–975, 2020.
- [10] **Journal article:** K. S. Rekha, T. H. Sreenivas, and A. D. Kulkarni, "Remote monitoring and reconfiguration of environment and structural health using wireless sensor networks," *Materials Today Proceedings*, vol. 5, no. 1, pp. 1169–1175, 2018.
- [11] **Conference:** D. Alulema, M. Zapata, and M. A. Zapata, "An IoT-based remote monitoring system for electrical power consumption via web-application," in *Proceedings of the 2018 International Conference on Information Systems and Computer Science (INCISCOS)*, Quito, Ecuador, November 2018.
- [12] **Journal article:** A. I. Paganelli, P. E. Velmovitsky, P. Miranda et al., "A conceptual IoT-based early-warning architecture for remote monitoring of COVID-19 patients in wards and at home," *Internet of Things (Netherlands)*, vol. 18, Article ID 100399, 2022.
- [13] Ghosh, H., Tusher, M.A., Rahat, I.S., Khasim, S., Mohanty, S.N. (2023). Water Quality Assessment Through Predictive Machine Learning. In: Intelligent Computing and Networking. IC-ICN 2023. Lecture Notes in Networks and Systems, vol 699. Springer, Singapore. https://doi.org/10.1007/978-981-99-3177-4_6
- [14] Alenezi, F.; Armghan, A.; Mohanty, S.N.; Jhaveri, R.H.; Tiwari, P. Block-Greedy and CNN Based Underwater Image Dehazing for Novel Depth Estimation and Optimal Ambient Light. *Water* 2021, 13, 3470. <https://doi.org/10.3390/w13233470>