

# EFFICIENT ENERGY MANAGEMENT APPROACH FOR TRACKING LOCATION IN WIRELESS SENSOR NETWORKS

Dr.T.Sasilatha<sup>1,\*</sup>, M.Parameswari<sup>2</sup>, Dr.P.Suresh Mohan Kumar<sup>3</sup>

<sup>1</sup>Dean, Department of EEE, AMET Deemed to be University, Chennai, Tamilnadu, INDIA – 603112.

<sup>2</sup>Associate Professor, Department of IT, Kings Engineering College, Chennai, Tamilnadu, INDIA – 602117.

<sup>3</sup>Professor and Dean, DMI College of Engineering, Chennai, Tamilnadu, INDIA – 600123.

E-Mail: sasi\_saha@yahoo.com, paramuvaishnavcse@gmail.com, psureshmohankumar@gmail.com

## Abstract

Energy administration is fundamental to stretch the system lifetime in sensor systems. In the past, the group guiding services based on RFIDs involved and remote sensor organize has a detecting field changed with different self-ruling vacationer gatherings, each with a pioneer and a few members. Sensor nodes need to track pioneer's area and keep up following ways from members to pioneers. Minimizing the energy consumption while providing high access in location tracking is a challenging problem as sensor nodes are considered in terms of energy. We propose a solution to manage the power to such an application. An EEM (Efficient Energy Management) approach is presented. The objective is to diminish the quantity of hubs support in order to enhance the lifetime of system. The approach applies the TDMA arranged nap planning to empower dependable gathering controlling hubs effortlessly, low activity stack and at low vitality usage. The results have been derived from the NS2 simulator and shows that the proposed technique performs better than the group guiding framework.

**Keywords:** Energy management, Sensor network, Sleep scheduling, Location tracking, Help services.

Received on 07 May 2018, accepted on 13 July 2018, published on 12 September 2018

Copyright © 2018 Dr.T.Sasilatha *et al.*, licensed to EAI. This is an open access article distributed under the terms of the Creative Commons Attribution licence (<http://creativecommons.org/licenses/by/3.0/>), which permits unlimited use, distribution and reproduction in any medium so long as the original work is properly cited.

3rd International Conference on Green, Intelligent Computing and Communication Systems - ICGICCS 2018, 18.5 - 19.5.2018, Hindusthan College of Engineering and Technology, India

doi: 10.4108/eai.12-9-2018.155561

## 1. Introduction

Wireless sensor network (WSN) is a type of ad-hoc network. Architects and Researcher are showing their interest of research to its wide utilized in applications such as (earthquake, supper cyclone etc. by forecasting

the climate, air population quantification, forest fire detection and di-hydrogen monoxide quality quantification). The hubs contain control compelled batteries, which are frequently hard and all the more exorbitant to be changed once the hubs are conveyed. Sensor hub eats up for the most part its vitality in transmitting and accepting parcels. With a specific end goal to build vitality effectiveness and broaden the system

\*Corresponding author. Email: sasi\_saha@yahoo.com

lifetime, a productive power sparing calculations must be created. Rest booking is an extensively utilized system in remote sensor system to diminish the vitality utilization since wastage of vitality can be spared happened because of sit still listening state.

As of late, the combination of RFIDs and remote sensor systems (WSNs) is exceptionally valuable in numerous applications. In light of aloof or dynamic radio recurrence innovations, RFIDs can bolster distinguishing proof easily [1]. Then again, a WSN comprises of numerous little, multi-utilitarian, low-control, self-governing hubs with coordinated detecting, handling, and correspondence abilities [2], [3]. In the gathering directing framework [4], a WSN is conveyed with the end goal of area following by estimating signals discharged by client identifications. Every vacationer amass has one visit guide and a few individuals. Just the visit control conveys an identification, which can transmit signals for the area following reason. For prudent reason, every part basically conveys a ticket labeled with an inactive RFID tag. Along these lines, just the areas of visit aides can be followed. Since the framework must have some UIs, every hub in the WSN is furnished with a "heading board", which contains a LED board that can demonstrate some essential data. Likewise, some sensor hubs are assigned as "help focuses", every one of which is associated with a RFID per user and a workstation, to give more top to bottom controlling administrations.

## 2. Related Work

The communication protocol utilized as a part of the sensor systems ought to be light weight and ought not to devour more vitality. Sensor hub in WSN is little, its energy supply unit ought to be little and furthermore it should bolster every one of its tasks without corrupting the execution. Thus, we are going for a decent planning convention and keeping that applying it, control utilization is the one which ought to be remembered at the top of the priority list. The creators in [5], [6] has demonstrated that the sit without moving listening state is the significant wellspring of vitality wastage. Actually, it can devour nearly an indistinguishable measure of vitality from required for accepting. In this manner, hubs are by and large planned to rest when the radio modules are not being used [7]. After the rest planning, hubs could work in a low obligation cycle mode that they occasionally start up to check the channel for movement.

Keshavarzian et al. [8] examined distinctive rest booking plans and proposed a planning strategy that can diminish the conclusion to-end general postponement. This strategy did not, in any case, give an obstruction free booking, in which each hub can start up and transmit or get its messages without impedence amid the doled out schedule vacancies. One prominent way to deal with evade obstruction is to receive the time division numerous entrance (TDMA) MAC conventions, which can specifically bolster low obligation cycle tasks and has the

regular focal points of having no conflict presented overhead and crashes. TDMA can ensure a deterministic postpone bound. Along these lines, we are occupied with planning a proficient TDMA rest booking for WSNs. TDMA conventions partition time into openings, which are apportioned to sensor hubs that can turn on the radio amid the allotted availabilities, and kill the radio when not transmitting or accepting in the rest planning [19].

Keeping in mind the end goal to be without obstruction, a straightforward approach is to appoint every correspondence connect a schedule opening, and therefore, the quantity of availabilities is equivalent to the quantity of correspondence connections of the system. This plan requires considerably more vacancies than should be expected, which expands the deferral and decreases the channel use fundamentally. This is on the grounds that multi-bounce systems can influence space to reuse in the common channel, and different transmissions can be planned for one schedule vacancy with no obstruction. A few estimated calculations have been proposed in the connection planning issue [9] – [12]. Nonetheless, if the TDMA connect planning is utilized as the startup component in the rest booking; a hub may start up various circumstances to speak with its neighbors. The typical startup time is on the request of milliseconds, while the transmission time might be not as much as that if the parcels are little [13]. Therefore, the transient vitality utilization amid the startup procedure can be higher than the vitality amid the genuine transmission. In the event that a sensor hub begins up too every now and again, it needs additional time, as well as costs additional vitality for the state change. Hence, the state progress, e.g., from the rest state to the dynamic state, ought to be considered for a vitality effective TDMA rest planning for WSNs [18].


Centralized navigation protocols are advanced in [14] to build guiding for robust. Sensors are monitored using base stations and it also provides guiding path. Guiding path cannot be adjusted by such centralized method adaptively. Distributed guiding algorithms are advanced in [15] [16] and it introduced distributed algorithm to build guiding path safely away from danger events as possible. Artificial forces such as, attractive potential and repulsive potentials, to pull and push the moving object respectively. Degrees of danger is indicated by this potential values. To overcome this degree of danger the distributed navigation algorithm is proposed [16]. To overcome the cost of communication WSN is decreased into sub-graphs, known as skeletons, which are rectangular graph. Skeleton graphs are used to construct the guiding paths. This works for many navigation application which destinations are fixed. The tracked objects in our group guiding problem that are seen in the previous methods, are mobile. The graph based method is proposed [16] for the emergency scenario because the dangerous areas can be isolated by the sub-graphs. Further all these have no concepts of groups so people are guided for same guiding paths. In [17], a novel

pheromone-based object tracking method which is introduced to construct tracking paths using RFID system. RFID tags are placed on the ceiling and readers and writers are carried by object and trackers. However, it is difficult to use RFID to implement the idea .since RFID tag cannot forward messages proactively , the pheromone information is distributed heavily relies on writer to write information on tags. The trackers cannot track objects correctly if they cannot gather correct pheromone information. Finally, since RFID tags have no communication capability, which is recognized by pheromone levels of direction, has to be implemented at trackers side. These make recognizing the concept on RFID system difficult not to mention providing tacking services for multiple groups.

In this paper, we utilize another vitality demonstrate, where the vitality utilization of the state change is considered. The proposed convention is useful in finding the gathering pioneers at low power, keeping up the development of the way at low power and furnishing the route administrations with low power utilization.

### 3. STRATEGIC NODE DEPLOYMENT APPROACH

A WSN is sent in a detecting field with one or numerous traveler gatherings. Each gathering has one pioneer and a few individuals. The framework gives the accompanying administrations: (i) following the areas of pioneers, (ii) keeping up the managing ways to every pioneer (iii) demonstrating directing ways for lost individuals, and (iv)helping pioneers to call their individuals. The framework engineering is appeared in Fig. 1.

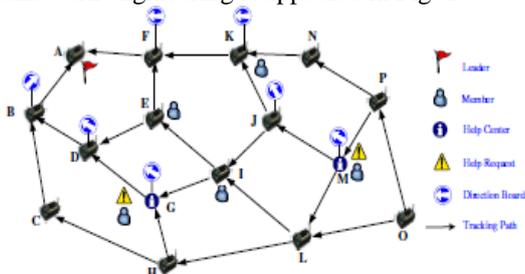

**Figure. 1** System Architecture EEM

Each gathering pioneer conveys an identification that can produce 4 kHz sound signs to permit the WSN to track its area. Each gathering part just conveys a ticket with a detached RFID tag containing a gathering ID. Each sensor hub is appended to a course board for showing straightforward managing heading. A few hubs in the WSN are assigned as help centers, each associated with a PC and a RFID per user. A gathering directing convention is keep running at every sensor hub. The three administration situations of this framework are given beneath:

1. Pioneer following: At ordinary time, each identification will communicate flags occasionally.

Sensor hubs collaborate to track the areas of gathering pioneers and keep up the managing way from every sensor hub to every pioneer. Cases of following ways are appeared in Fig. 1.

2. Help benefit: When a part gets lost, he/she can go to any assistance focus and present his/her ticket to the RFID per user. At that point managing headings can be appeared on the screen of the assistance focus and in addition the bearing sheets of those sensors which shape a directing way toward the sensor that is following the pioneer. Fig. 1 demonstrates some assistance focuses and heading sheets.

3. Member Recall: A gathering pioneer can likewise call his/her individuals back by pushing a catch on the identification. A communicate message will be overwhelmed to the system. All course sheets on sensors will demonstrate the controlling headings to the sensor which is following the pioneer.

#### A. Pioneers' Badges

Each identification will occasionally communicate sound signs for the WSN to track its area. We abstain from utilizing RF transmitters to keep the cost low. An identification is made out of a bell, a switch circuit, a control module, some control catches, and a power supply.

#### B. Sensor Nodes

The sensor hubs are acknowledged by Micaz bits, which can detect sounds through their amplifiers.

#### C. Help Centers

An assistance focus is a workstation associated with a sensor hub and a RFID peruser First, given a gathering ID, it will discover the area of the gathering pioneer and ask sensors on the way toward the pioneer to show guidelines on their course sheets. Second, the route ways will likewise be appeared on its screen with the goal that the client can have a worldwide view about pioneer area.


### 4. Proposed System

The destinations of the proposed approach with rest planning are as per the following:

- (i) Most sensor hubs ought to be in rest mode more often than not with the goal that the vitality utilization by every hub is diminished.
- (ii) Time required to transmit information is as least as could reasonably be expected.

In our approach, we accept that every hub works in three states: dynamic state (transmits, get and tune in), rest state, and transient (state change). The vitality

utilization of sensor hubs in the rest state is substantially less than the utilization in the dynamic state, and a huge vitality sparing can be accomplished if the rest state is utilized amid the times of latency. The transient state contains two procedures: startup (from the rest state to the dynamic state), and turndown (from the dynamic state to the rest state). The vitality demonstrate is shown in Fig. 2 (a) and there is a noteworthy vitality utilization and time overhead when the sensor's radio powers on and off. Fig. 2 (b) demonstrates that consolidating the sensor's dynamic schedule openings together can lessen the startup recurrence to spare both vitality and time, which benefits the obligation cycle organize outline.

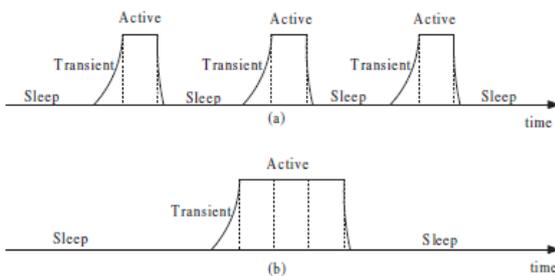

**Figure. 2** Energy model: (a) Before active time slots merged, (b) After active time slots merged

### Location tracking

Every sensor in the WSN has three states: tracker, non-tracker and competitor. The sensor that is checking the pioneer identification  $L_i$  is called  $L_i$ 's tracker. (For each identification  $L_i$ , just a single sensor fills in as its tracker, however a sensor can fill in as a tracker for various identifications) alternate sensors are non-trackers or hopefuls. The sensor in the applicant state is one which is endeavouring to end up a tracker. For every sensor hub the state is checked. (Tracker, non-tracker or competitor) If it is in followed mode, at that point the sensor hub moves to the dynamic state. Next if the state is in the non-tracker state it moves to the transient state (dynamic state to rest state). At the point when sensor hub is in the competitor express the sensor hub moves to the rest state. Again when the hub moves toward becoming tracker for any pioneer identification the hub movements to the dynamic state. Here the transient state is from rest to dynamic state.

### Help Service

At the point when a part gets lost, he/she can go to any assistance focus  $N_h$ , and present his/her ticket to the RFID peruser. The  $N_h$  hub stays in rest state until the point that it gets the assistance ask. Here the assistance ask for go about as wake up flag to the  $N_h$ . On getting such a demand, the assistance focus sensor hub  $N_h$  goes to dynamic state. At that point it communicate the Help\_Req message to every one of the hubs in the systems. The Help\_Req(  $L_i$ , Path,  $N_h$ ) message contains the Leader identification  $L_i$ , way data and help hub id  $N_h$ .

On accepting the message the relating tracker hub of  $L_i$  sends the Reply flag to the hub  $N_h$  and to every one of the hubs that in that way bearing. The Reply flag goes about as the wake up motion for the hubs in the way. The way hubs wake up from the rest state to dynamic state and show bearing. The  $N_h$  display the bearing data of the pioneer for a couple of day and age then it travel to the rest state.

### Pseudocode for Tracking Location

```

Begin
  Repeat for I = 1 to Gno.

    If NSTATE = 'TRACKER'
      NODE → ACTIVE
    Else if NSTATE = 'NONTRACKER'
      NODE → TRANSIENT
    Else
      NODE → SLEEP
  End

```

If there should arise an occurrence of part review when the tracker hub of pioneer gets the RECALL flag the tracker wake the way hubs with the goal that the way hubs that are in rest state travel to dynamic state and show the heading data. It stays in that state for a specific time at that point change to rest states.

### Pseudocode for Help service

```

Begin
  If RFID = 'VALID'
    HNODE → ACTIVE
    Broadcast HELP_REQ( $L_i$ , Path,  $N_h$ )
    If NODE = 'TRACKERi'
      Send REPLY to HNODE, PNODES
      PNODES → ACTIVE
      PNODES display direction
      HNODE display direction
      HNODE → SLEEP
      PNODES → SLEEP
    Else
      NODE LOST
  End

```

## 5. Simulation Results


The parameters used for the simulation of the proposed scheme are described in table 1. Our evaluation is done based on the simulation environment which is implemented by NS2 with 25 and 50 nodes deployed in the simulation area 1000×1000. The traffic is handled using the traffic model Constant Bit Rate (CBR). Each and every node has the direct link with the nodes within the range 250m. The nodes are communicated with each other by using User Datagram Protocol (UDP). The radio waves are propagated by using the propagation model two

ray ground. All the nodes receive the signal from all directions by using the omni-directional antenna.

**Table. 1** Simulation parameters

Parameter	Value
Channel Type	Wireless Channel
Simulation Time	100 ms
Number of nodes	50
MAC type	802.11
Traffic model	CBR
Simulation Area	1000×1000
Transmission range	250m
Network Interface Type	WirelessPhy
Radio Propagation model	TwoRayGround
Mobility Model	Random Way Point
Antenna Model	Omni Antenna

Figure 3 compares the energy consumption for our routing protocol with the Group Guiding protocol that is implemented without energy saving. It is clear that, EEM approach provides the energy efficiency for the location tracking system. The results showed below were implemented based Pseudo code on the Help services after the tracking of nodes.

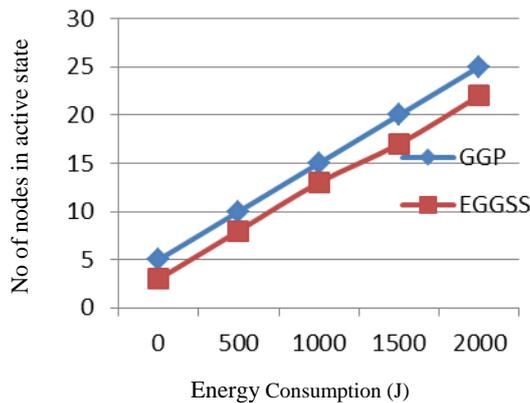


**Figure. 3** Energy consumption Comparison

### Throughput

Throughput refers to the total number of packets successfully delivered across the system for every 1000 packets sent. Throughput is obtained using equation.

$$\text{Throughput} = \frac{\sum_0^n \text{Packets Received}(n) * \text{Packet size}}{1000}$$

Figure 4 shows the throughput usage for tracking location in sensor network which provides the improvement of the network performance in EEM approach.

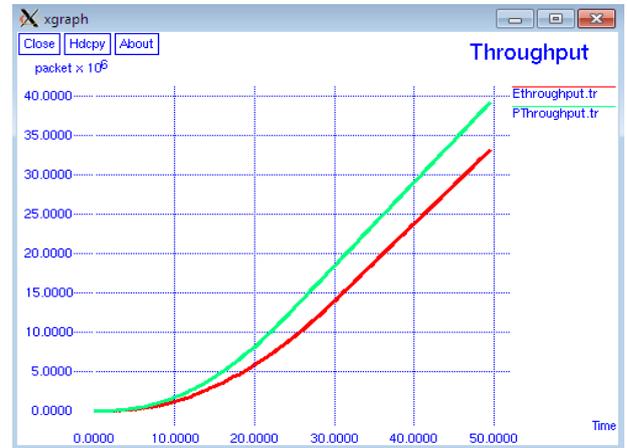


**Figure. 4** Throughput for location tracking

### Packet loss ratio

The Packet Loss Rate (PLR) is defined as the difference between the sent packets and received packets in the system per unit time as in equation.

$$PLR = \frac{\sum_0^n \text{Sent Pkts} - \text{Rcvd Pkts}}{\text{Time}}$$

Figure 5 describes the packet loss ratio while tracking location of nodes.

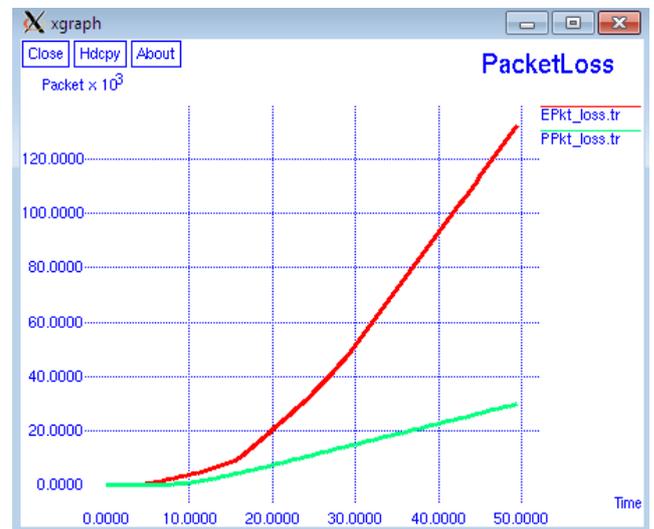

**Figure.5** Packet Loss Ratio

## 6. CONCLUSION

In this paper, a novel approach named EEM (Efficient Energy administration) approach is proposed for enhancing the power administration for area following by RFIDs and remote sensor systems. The convention is

TDMA based rest booking that empowers the following gathering pioneers at low power, keeping up the way development at low power and furnishing the route administrations with low power utilization. The system lifetime is kept up through the assistance administrations and its exhibitions were investigated in light of their parameters. Simulation results shows that the proposed approach can reduce the energy consumption when updating the network management information and can support different number of groups. Even lifetime of the network is also improved.

In future, EEM approach can be extended to provide support for people/object searching and emergency guiding services.

## References

- [1] R. Weinstein, "RFID: a technical overview and its application to the enterprise," *IEEE IT Professional*, vol. 7, no. 3, pp. 27–33, May 2005.
- [2] I. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "A survey on sensor networks," *IEEE Commun. Mag.*, vol. 40, no. 8, pp. 102–114, Aug. 2002.
- [3] M. Tubaishat and S. Madria, "Sensor networks: an overview," *IEEE Potentials*, vol. 22, no. 2, pp. 20–23, Apr./May 2003.
- [4] P. Y. Chen, W. T. Chen, C. H. Wu, Y.-C. Tseng, and C.-F. Huang, "Providing Group Tour Guide by RFIDs and Wireless Sensor Networks," *IEEE Transactions on wirelesscommunications*, Vol 8, No. 6, June 2009
- [5] W. Ye, J. Heidemann, and D. Estrin, "An energy-efficient MAC protocol for wireless sensor networks," in *Proc. of IEEE INFOCOM*, 2002.
- [6] T. Dam and K. Langendoen, "An adaptive energy-efficient MAC protocol for wireless sensor networks," in *Proc. of the First ACM Conference on Embedded Networked Sensor Systems (SenSys)*, 2003.
- [7] Y. Sun, S. Du, O. Gurewitz, and D. B. Johnson, "DW-MAC: a low latency, energy efficient demand-wakeup MAC protocol for wireless sensor networks," in *Proc. of ACM MobiHoc*, 2008.
- [8] A. Keshavarzian, H. Lee, and L. Venkatraman, "Wakeup scheduling in wireless sensor networks," in *Proc. of ACM MobiHoc*, 2006.
- [9] S. Ramanathan and E. L. Lloyd, "Scheduling algorithms for multihop radio networks," *IEEE/ACM Transactions on Networking*, vol. 1, no. 2, pp. 166–177, 1993.
- [10] S. Gandham, M. Dawande, and R. Prakash, "Link scheduling in sensor networks: Distributed edge coloring revisited," in *Proc. of IEEE INFOCOM*, 2005.
- [11] W. Wang, Y. Wang, X. Y. Li, W. Z. Song, and O. Frieder, "Efficient interference-aware TDMA link scheduling for static wireless networks," in *Proc. of ACM MobiCom*, 2006.
- [12] P. Djukic and S. Valaee, "Link scheduling for minimum delay in spatial re-use TDMA," in *Proc. of IEEE INFOCOM*, 2007.
- [13] A. Wang, S. Cho, C. Sodini, and A. Chandrakasan, "Energy efficient modulation and MAC for asymmetric RF microsensor systems," in *Proc. of the 2001 International Symposium on Low Power Electronics and Design (ISLPED)*, 2001.
- [14] P. Corke, R. Peterson, and D. Rus, "Localization and navigation assisted by cooperating networked sensors and robots," *Int. Journal of Robotics Research*, vol. 24, no. 9, pp. 771–786, Oct. 2005.
- [15] Deepti Goyal, Sonal, "Power management in Wireless Sensor Network", in Computing for Sustainable Global Development (INDIACom), 2016 3rd International Conference on March 2016.
- [16] Mahmuda akter, , MD. Obaidur rahman2, , MD. Nazrul islam,"Energy-Efficient Tracking and Localization of Objects in Wireless Sensor Networks", IEEE Access 2018.
- [17] M. Mamei and F. Zambonelli, "Pervasive pheromone-based interaction with rfid tags," *ACM Trans. Auton. Adapt. Syst.*, vol. 2, no. 2, p. 4, 2007.
- [18] Praveen, J.S., Mayilvahanan, "Path optimization algorithm in wireless sensor network with obstacle" Indonesian Journal of Electrical Engineering and Computer Science 9(3), pp. 599-601,2018
- [19] Mohamed Divan Masood, A., Muthusundar, S.K. , "Load balance: Energy efficient routing protocol in wireless sensor network", Indonesian Journal of Electrical Engineering and Computer Science 9(3), pp. 561-564, 2018.